

AU *limate*



TRAILER LENGTHS AVAILABLE FROM 42' TO 53' OAL

BELT WIDTHS ARE 54 INCH AND 30 INCH

SIDE HEIGHTS 52 INCH , 60 INCH OR 70 INCH , SIDE EXTENSIONS AVAILABLE

BELT AND REAR GATES ARE ALL POWERED BY ONE SIMPLE HYDRAULIC SYSTEM

FULL HEIGHT PLASTIC 3/16 HMW SIDE LINER FULL LENGTH , 3/8 UHMW UNDER CHAIN

TANDEM AIR RIDE IS STANDARD ,24 INCH KING PIN, OTHER AXLE CONFIGURATIONS AVAILABLE

ROLL TARP –AIR RIDE SUSPENSION – 11.5 X 22.5 RADIALS ON 10 BOLT HUB PILOT WHEELS

STANDARD – DURABLE-AND REPAIRABLE ALL STEEL CONSTRUCTION

AULICK
= INDUSTRIES =

1-877-285-4258

(specifications subject to change)

AU *ultimate*

SPECIFICATIONS : 30 INCH BELT



MODEL	LENGTH	CAPACITY	BELT WIDTH	HEIGHT	APROX WEIGHT
4252303	42 FT	42 CU/YD	30	9FT 0IN	15000
4652302	46 FT	45 CU/YD	30	9FT 0IN	16000
4652303	46 FT	45 CU/YD	30	9FT 0IN	17300
5152304	51 FT	50 CU/YD	30	9FT 0IN	16880

CAPACITY'S/WEIGHTS ARE APPROXIMATE AND SUBJECT TO CHANGE

AU *ultimate*

SPECIFICATIONS : 54 INCH BELT
TANDEM AXLE



MODEL	LENGTH	CAPACITY	BELT WIDTH	HEIGHT	APROX WEIGHT
4260542	42 FT	56 CU/YD	54	9FT 8IN	15260
4270542	42 FT	66 CU/YD	54	10FT 6IN	16080
4660542	46 FT	61 CU/YD	54	9FT 8IN	15920
4670542	46 FT	73 CU/YD	54	10FT 6IN	16880
4860542	48 FT	65 CU/YD	54	9FT 8IN	16600
4870542	48 FT	76 CU/YD	54	10FT 6IN	16950

CAPACITY'S/WEIGHTS ARE APPROXIMATE AND SUBJECT TO CHANGE

AU *ultimate*

SPECIFICATIONS : 54 INCH BELT
TRIPLE AXLE



MODEL	LENGTH	CAPACITY	BELT WIDTH	HEIGHT	APROX WEIGHT
4660543	46 FT	61 CU/YD	54	9FT 8IN	17500
4670543	46 FT	69 CU/YD	54	10FT 8IN	17900
4860543	48 FT	65 CU/YD	54	9FT 8IN	18100
4870543	48 FT	76 CU/YD	54	10FT 6IN	18700

CAPACITY'S/WEIGHTS ARE APPROXIMATE AND SUBJECT TO CHANGE

AU *ultimate*

**SPECIFICATIONS : 54 INCH BELT
QUAD AXLE**



MODEL	LENGTH	CAPACITY	BELT WIDTH	HEIGHT	APROX WEIGHT
5170544	51 FT	80 CU/YD	54	10FT 6IN	22000 INSULATED
5160544	51 FT	65 CU/YD	54	10FT 6IN	21600 INSULATED

CAPACITY'S/WEIGHTS ARE APPROXIMATE AND SUBJECT TO CHANGE



**SOLID SIDE EXTENSIONS
(OPTIONAL)**




**FULL OPEN – UNRESTRICTED
END GATE (STANDARD)**



GRAIN CHUTE (OPTIONAL)



**TAPERED EXTENSIONS
(OPTIONAL)**

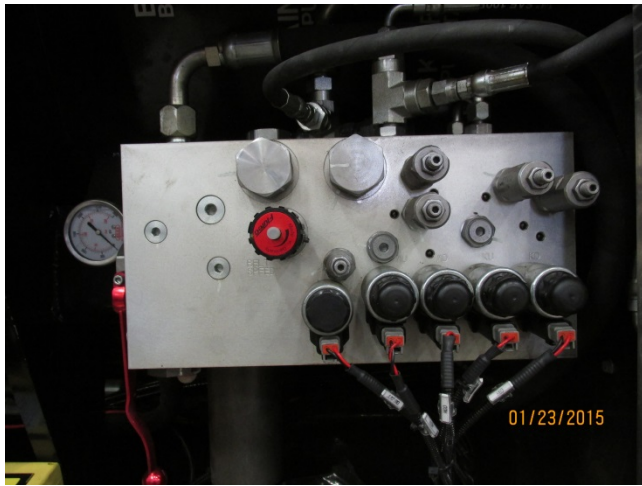

ELECTRIC VALVE (OPTIONAL)



GRAIN CHUTE (OPTIONAL)



ALUMINUM SHEETING (OPTIONAL)





TANDEM SET FORWARD 18 INCHES



**TANDEM WITH AIR LIFT TAG(OR
PUSHER)**



**QUAD AXLE
STEERABLE LIFT**



**10-2
TRIPLE**



STANDARD SPECIFICATIONS

FLOOR CHAIN IS 88C PINTLE CHAIN , 2 STRANDS

EASY ACCESS BELT ADJUSTMENT AT FRONT OF TRAILER

2 PLY BELT FLAPS FULL WIDTH OF FLOOR 17 ½ X 30 INCH OR 54 INCH

BOLT ON (REMOVABLE) 5TH WHEEL

GEAR – DRIVE IS A ESKRIDGE 130000 IN/LB TORQUE 18000 LB RADIAL LOAD

2 15/16 REAR DIAMETER DRIVE SHAFT , WITH WELD ON SPROCKETS AND SPLINED HUB

HYDRAULIC TOP HINGE MAIN GATE , 41 INCHES ABOVE THE TOP OF THE TRAILER WHEN OPEN

PLASTIC HMW SIDE LINER 3/16 THICK , ONE PIECE FULL LENGTH FROM FLOOR TO TOP OF TRAILER , BOTH SIDES

PLASTIC UHMW FLOOR LINER 3/8 THICK , FULL WIDTH OF BELT, FULL LENGTH , ONE PIECE

EXTENDED REAR DISCHARGE WITH WINGS

MECHANICAL LATCH ON REAR GATE , FOR POSITIVE LOCK

HIGH PRESSURE IN-LINE HYDRAULIC OIL FILTER

50000 LB LANDING GEAR

ABS BRAKE SYSTEM , 2S/1M ANTI/LOCK BRAKE SYSTEM

FRONT AND REAR FENDERS

11 X 22.5 RADIAL TIRES ON 10 BOLT RIMS , CENTRIFUGE BRAKE DRUMS

25000 LB AXLES WITH 16.5 X 7 BRAKES S-CAM WITH PARK BRAKE CHAMBERS ON 2 AXLES

TRAILER IS PAINTED WITH 2 PART PRIMER AND 2 PART TOP COAT

DOT LIGHTING AND REFLECTIVE TAPE

(SPECIFICATIONS SUBJECT TO CHANGE)